



**Anchor Nuts (Metric)**

**KM2000**

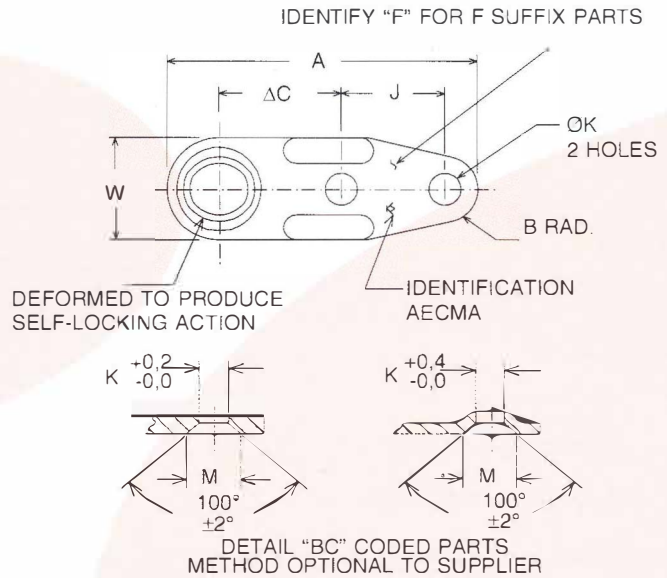

**KM2000**

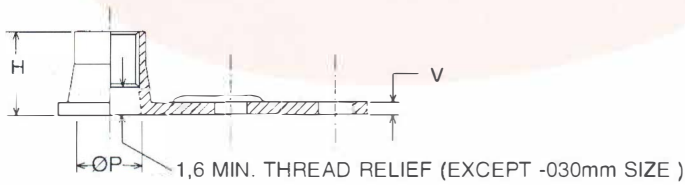

PART NUMBER	THREAD	A MAX	B REF	C Δ	H MAX	J ±0,05	K +0,2 -0,0	M ±0,25	P ±0,05	V MAX	W MAX	
KM2000-030	M3	0,50	17,7	2,5	6,0	3,2	6,0	2,5	4,8	—	0,70	6,0
KM2000-040	M4	0,70	23,7	3,0	8,5	5,2	8,0	2,5	4,8	4,2	1,00	8,0
KM2000-050	M5	0,80	25,2	3,0	9,5	6,2	8,0	2,5	4,8	5,2	1,00	9,0
KM2000-060	M6	1,00	27,7	3,5	11,0	7,1	8,0	3,3	6,0	6,2	1,25	10,0
KM2000-080	M8	1,25	31,0	3,5	13,0	8,2	8,0	3,3	6,0	8,4	1,65	12,6
KM2000-080F	M8	1,00	31,0	3,5	13,0	8,2	8,0	3,3	6,0	8,4	1,65	12,6
KM2000-100	M10	1,50	38,8	4,5	16,0	9,9	10,0	3,3	6,0	10,4	1,75	16,2
KM2000-100F	M10	1,25	38,8	4,5	16,0	9,9	10,0	3,3	6,0	10,4	1,75	16,2

**MATERIAL:** C1050 carbon steel per AMS 5085 (UNS G10500).

**FINISH:** Cadmium plate per QQ-P-416, Type II, Class 2 and Kaylube molybdenum disulfide dry film lubricant per MIL-L-46010.

**THREAD DATA:** Thread Profile: ISO 5855/1 and to MJ minor dia.  
Tolerances: ISO 5855/2. Class 4H5H.

**PERFORMANCE:** AECMA 2053 (Tensile strength is based on 1100 MPa).

**TEMPERATURE:** 235°C.

**DIMENSIONS:** NFL 22552. ALN 29673.

**VARIATION:** Add "BC" for bottom c'sunk rivet holes.  
Example: KM2000-050BC.

**NOTE:** Δ The centre tap hole shall not deviate from centre of the plate nut, as determined by the rivet holes, by more than 0,1 mm.

**KM2000**

**ANCHOR NUT**  
**ONE LUG, METRIC**

**KM2000**




Anchor Nuts (Imperial)

K2000



K2000

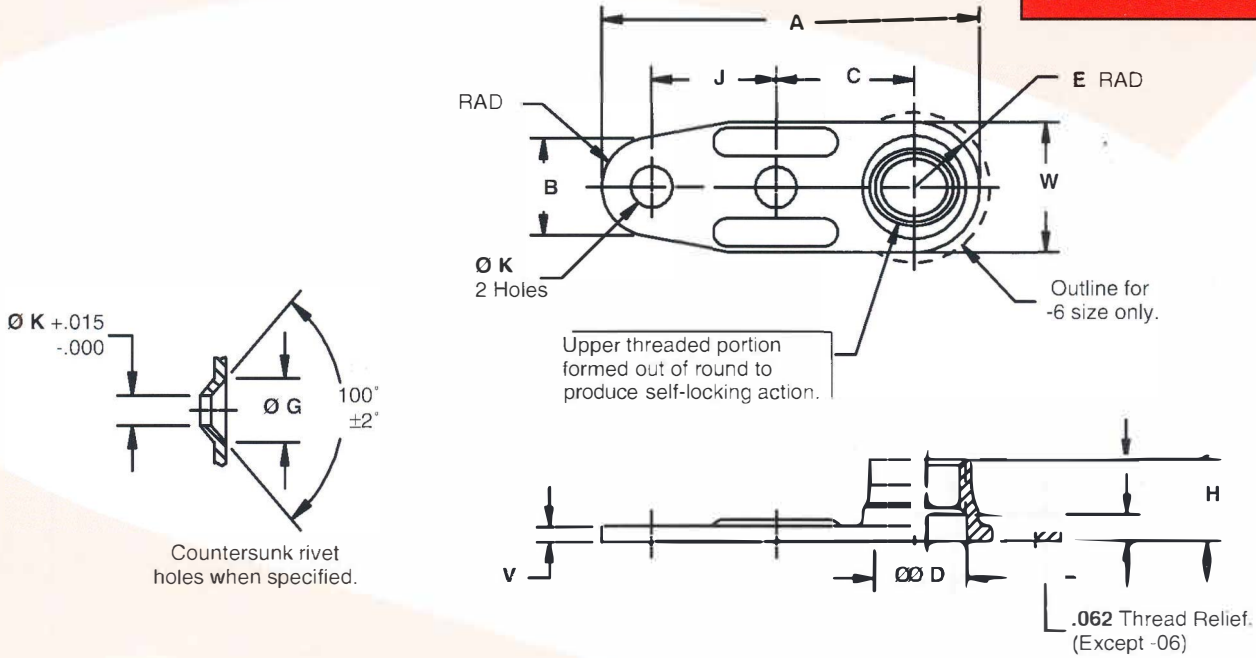

PART NUMBER	THREAD (MIL-S-8879)	A MAX	B REF	C ±.005	D MIN	E REF	G ±.010	H MAX	J ±.002	K +.005/-0.000	V REF	W MAX	APPROX WT LBS/100
K2000-06	.1380-32 UNJC-3B	.935	.215	.344	—	.149	.200	.145	.312	.098	.032	.297	.25
K2000-08	.1640-32 UNJC-3B	.935	.215	.344	.168	.149	.200	.215	.312	.098	.032	.297	.25
K2000-3	.1900-32 UNJF-3B	.950	.215	.344	.194	.164	.200	.220	.312	.098	.032	.328	.30
K2000-4	.2500-28 UNJF-3B	.993	.215	.344	.254	.207	.200	.281	.312	.098	.040	.414	.50
K2000-5	.3125-24 UNJF-3B	1.210	.265	.500	.317	.253	.230	.328	.312	.130	.050	.505	.91
K2000-6	.3750-24 UNJF-3B	1.284	.265	.500	.379	.307	.230	.344	.312	.130	.055	.614	1.06

**MATERIAL:** C1050 carbon steel per AMS 5085 (UNS G10500).

**FINISH:** Cadmium plate per QQ-P-416, Type II, Class 2 and Kaylube molybdenum disulfide dry film lubricant per MIL-L-46010.

**PERFORMANCE:** MIL-N-25027.

**VARIATIONS:** Add "BC" for bottom countersunk rivet holes., Example: K2000-3BC.

K2000

ANCHOR NUT  
ONE-LUG

K2000