


- Identification ties with incorporated label for durable marking and tying
- Label forms onto the bundle
- Mil-specified types with up to 3 straps
- Trouble free installation
- Labelling of bundles up to 102 mm diameter
- Simple marking on the roughened writing surface using the special marking pen WT163M-1 / WT163M-3 (black or red)
- All edges are rounded and surfaces smoothed to make installation easier

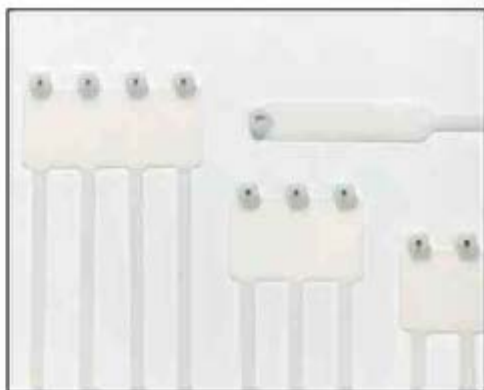

Technical Information

Material - Moulding	Polyamide 6.6
Material - Locking barb	316 grade stainless steel
Temperature range	-40°C to +85°C
Colour	Natural
Approvals	MIL: MS-3368 -1, -2, -3, -4
Flammability rating	UL 94 V-2
Other properties	Halogen free, Silicone free

TY48M




TY46M



TY46MD



TY46MT

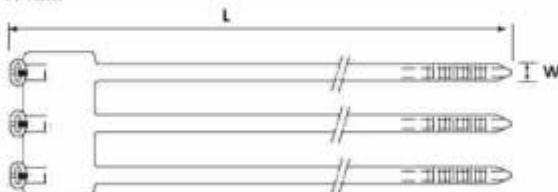

Approvals



E49405

TY46MF



Ordering Information

PRODUCT REF.	MIL SPEC.	LENGTH L [mm]	WIDTH W [mm]	THICKNESS [mm]	BUNDLE DIAMETER FROM ... TO [mm]	MINIMUM TENSILE STRENGTH [N]	LABEL DIMENSIONS [mm]	QUANTITY [pieces]	TOLLING
TY48M	MS-3368-2	360	4.8	1.1	19 - 102	220	13.1 x 57.2	1000	
TY46M	MS-3368-1	184	4.8	1.1	9.5 - 45	220	13.1 x 27.0	1000	WT193A
TY46MD	MS-3368-3	184	4.8	1.1	9.5 - 45	220 x 2	29.7 x 27.0	500	ERG299
TY46MT	MS-3368-4	184	4.8	1.1	9.5 - 45	220 x 3	46.0 x 27.0	500	ERG297
TY46MF	-	184	4.8	1.1	9.5 - 45	220 x 4	63.1 x 27.0	500	TR227